



LED Diffused batten, surface mounted, slim design with integral electronic LED driver and rear access for easy installation.



LED Diffused Batten Luminaire range

BPLED series surface mounted LED Diffused Batten, slim design with white end caps, opal diffuser and integral electronic LED driver.

LED Diffused Batten series designed to meet the requirements of various watt and lumen packages:

Watt: from 10W up to 60W
CRI: CRI80+
Lamp's life time: 50,000Hrs L70 / B10
LED Driver: Integral Non-dimmable or DALI/DSI Dimmable

Colour finish: White

Applications:

Commercial and Residential applications. Schools, Offices, Storage rooms, Foyer.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.




*** NOTE: Dimensions and Cut Out sizes may change without notification.

LED Diffused Batten Luminaire range

Cat	System Watt	Luminaire Lumens	Colour Temperature	Size L x W x H	CRI
BPLED6-10	10W	1010	4000K	590x65x68	80+
BPLED6-20	20W	2080	4000K	590x65x68	80+
BPLED12-20	20W	1998	4000K	1190x65x68	80+
BPLED12-40	40W	3964	4000K	1190x65x68	80+
BPLED15-30	30W	2949	4000K	1490x65x68	80+
BPLED15-60	60W	5879	4000K	1490x65x68	80+

Optional Extras

Options	Suffix	Comments
Motion Sensor	MS	Integral
DALI/DSI Dimmable LED driver	EBD	Integral
Non-maintained Emergency	NM	Integral. Single point system emergency pack
Maintained Emergency	EBM	Integral. Single point system emergency pack

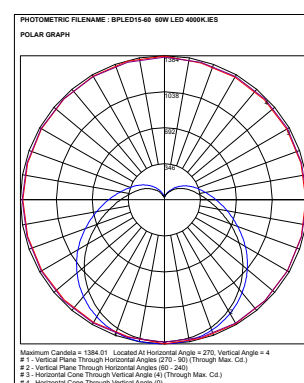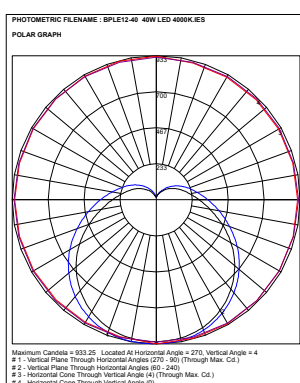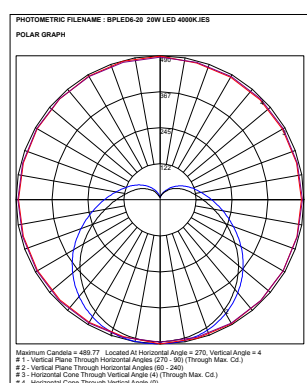

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.