



RLF0005-X series COI Cyanosis LED down light with high efficacy COB LED chip.
Die-Cast aluminium housing, remote LED driver.

<u>CRI:</u>	Cyanosis COI 1.87
<u>Colour Temperature:</u>	4000K
<u>LEDs Life Time:</u>	50,000Hrs L80 / B10
<u>Beam Angle:</u>	20° / 30° / 38° / 55°
<u>Driver options:</u>	Non-dimmable, DALI/DSI dimmable
<u>IP Rating:</u>	IP44
<u>IC Rating:</u>	IC-4
<u>Trim Colour:</u>	White finish

Applications:

Hospitals, Aged Care Facilities, Offices, Hotels, Bath rooms & Changing rooms

Lumen output based on Absolute lumens, 4000K LED chip 38° beam angle and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification




Rytec Lighting Australia Pty Ltd

Cat	Watt	Colour Temperature	Lumen Output	Beam	Size Dia x Height	Cut Out	IP	COI
RLF0005-X/1	6.8W	4000K	831	20° / 30° / 38° / 55°	90 x 57	72mm dia	IP44	YES
RLF0005-X/2	8.7W	4000K	1046	20° / 30° / 38° / 55°	90 x 78	72mm dia	IP44	YES
RLF0005-X/3	12.5W	4000K	1385	20° / 30° / 38° / 55°	90 x 83	72mm dia	IP44	YES

Optional Extras

Specify Example 12.5W : RLF0005-X - (3) - (Required beam angle) - (EBD)

Options	Suffix	Comments
Beam angle Example	38	Please specify required beam angle: 20° / 30° / 38° / 55°
DALI/DSI dimmable	EBD	DALI/DSI dimmable LED driver

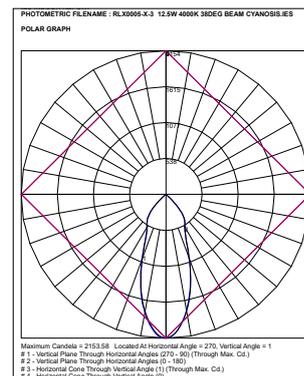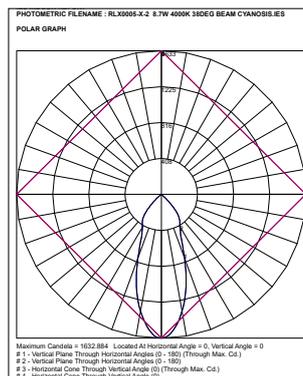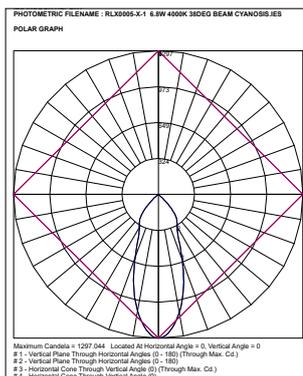

Lumen output based on Absolute lumens, 4000K LED chip 38° beam angle and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification