



RDSM series LED Surface mounted downlight with high efficacy COB LED chip.
Powder coated die-cast trim and housing. High efficacy LED chip, faceted reflector and clear lens for uniform distribution.
Designed with IP54 rating to suit various applications.

<u>CRI:</u>	CRI80+
<u>Lamp's Life Time:</u>	50,000Hrs L70 / B10
<u>Beam Angle:</u>	24° / 36° / 45° / 60°
<u>Driver options:</u>	Non-dimmable, Triac dimmable
<u>IP Rating:</u>	IP54
<u>Colour Temperature:</u>	2700K / 3000K / 4000K / 5000K
Luminaires's Colour:	White or Black finish

Applications:

General lighting, Offices, Foyers, Hotels, Shops, Supermarkets, Aged Care Facilities, Bathrooms & Changing rooms, Canopies

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.





*** NOTE: Dimensions and Cut Out sizes may change without notification.

RDSM series Surface mounted Downlight

Cat	Watt	Colour Temperature	Lumen Output	CRI	Beam	Size Dia x Height	IP
RDSM-10	10W	3000K 4000K	785 902	80+	60°	90 x 100	IP54
RDSM-15	15W	3000K 4000K	1045 1133	80+	60°	90 x 100	IP54
RDSM-25	25W	3000K 4000K	2181 2259	80+	24° / 45° /60°	120 x 110	IP54
RDSM-35	35W	3000K 4000K	2514 2680	80+	36° /60°	160 x 120	IP54

Optional Extras

Options	Suffix	Comments
Triac dimmable	DM	Triac dimmable LED driver

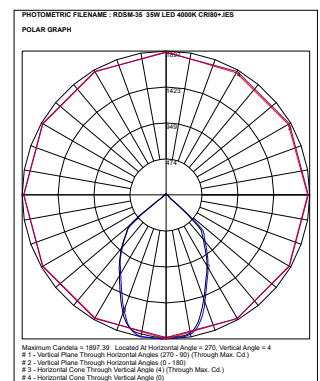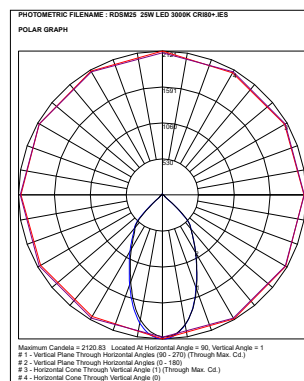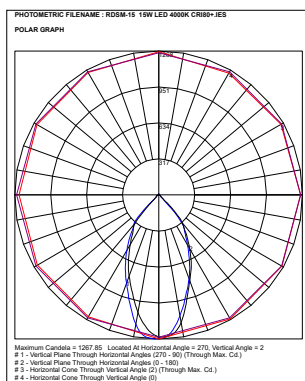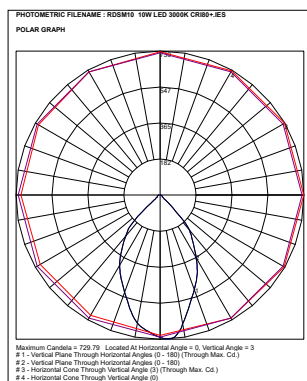

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.