



LED Bollard lights 9168 series, IP65 with high efficacy LED chips and integral electronic LED driver. LED lighting revolution and is making energy-wasting traditional lighting technologies obsolete through the use of energy efficient, environmentally friendly LED light.

IP65 LED Bollard luminaire designed with:

- Die-cast aluminium housing with high corrosion resistance.
- High purity aluminium heat conduction piece,
- UV-stabilised, Impact resistant opal polycarbonate diffuser,
- Silicon gasket for IP65 rating.
- Stainless steel fasteners.



<b><u>CRI:</u></b>	CRI80+
<b><u>Lamp's Life Time:</u></b>	50,000Hrs L70 / B10
<b><u>Driver options:</u></b>	Integral non-dimmable, DALI/DSI dimmable
<b><u>IP Rating:</u></b>	IP65
<b><u>Colour Temperature:</u></b>	2700K / 3000K / 4000K / 5000K
<b><u>Available Colour:</u></b>	Black finish. Special colour finish available on request.

**Applications:**

Hospitals, Schools, Aged Care facilities, Hotels, Factories, Pathways and Parkways.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.




\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.

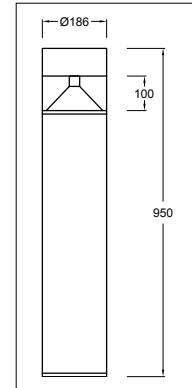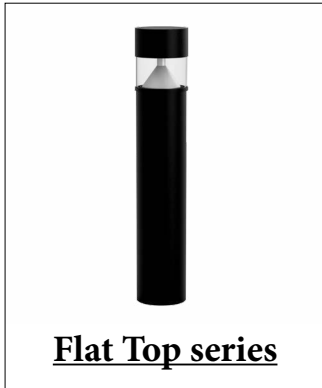

Cat	Watt	Colour Temperature	Lumen Output	CRI	Size Dia x Height	IP
RL9168/9/F20	20W	3000K 4000K	325 350	80+	Ø 186 x 950	IP65
RL9168/9/F28	28W	3000K 4000K	524 566	80+	Ø 186 x 950	IP65
RL9168/9/F36	36W	3000K 4000K	578 622	80+	Ø 186 x 950	IP65


## Optional Extras

Options	Suffix	Comments
3000K	3K	3000K Warm white LED chip
4000K	4K	4000K Cool white LED chip
5000K	5K	5000K Day light LED chip
DALI/DSI dimmable	EBD	Integral DALI/DSI dimmable LED driver

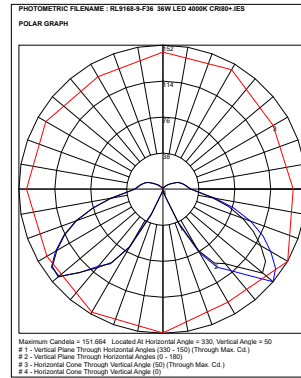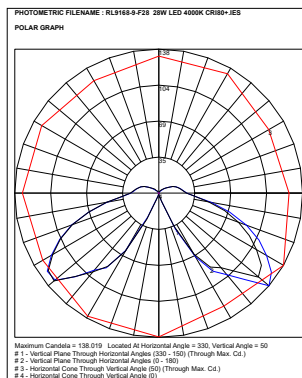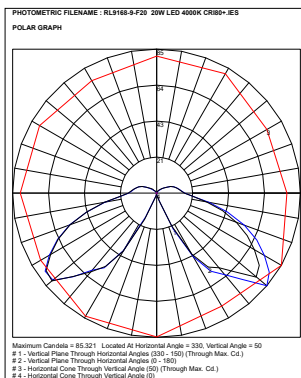

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.




\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.

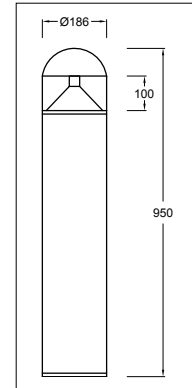

Cat	Watt	Colour Temperature	Lumen Output	CRI	Size Dia x Height	IP
RL9168/9/D20	20W	3000K 4000K	325 350	80+	Ø 186 x 950	IP65
RL9168/9/D28	28W	3000K 4000K	524 566	80+	Ø 186 x 950	IP65
RL9168/9/D36	36W	3000K 4000K	578 622	80+	Ø 186 x 950	IP65

## Optional Extras

Options	Suffix	Comments
3000K	3K	3000K Warm white LED chip
4000K	4K	4000K Cool white LED chip
5000K	5K	5000K Day light LED chip
DALI/DSI dimmable	EBD	Integral DALI/DSI dimmable LED driver

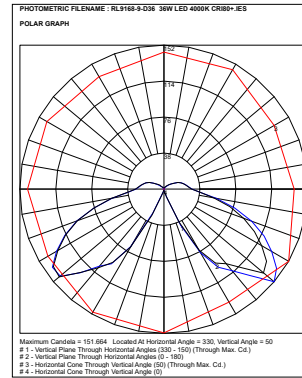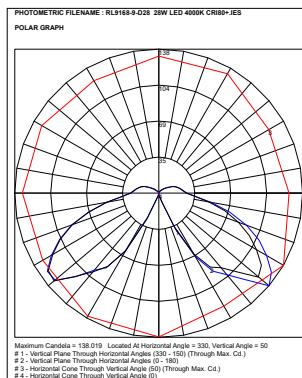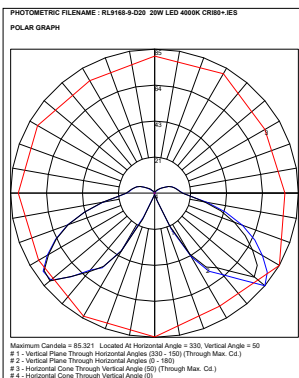

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.