



LED Bollard lights 9240 series, IP65 with high efficacy LED chips and integral electronic LED driver. LED lighting revolution and is making energy-wasting traditional lighting technologies obsolete through the use of energy efficient, environmentally friendly LED light.

IP65 LED Bollard luminaire designed with:

- Die-cast aluminium housing with high corrosion resistance.
- High purity aluminium heat conduction piece,
- UV-stabilised, Impact resistant opal polycarbonate diffuser,
- Silicon gasket for IP65 rating.
- Stainless steel fasteners.


<u>CRI:</u>	CRI80+
<u>Lamp's Life Time:</u>	50,000Hrs L70 / B10
<u>Driver options:</u>	Integral non-dimmable, DALI/DSI dimmable
<u>IP Rating:</u>	IP65
<u>Colour Temperature:</u>	2700K / 3000K / 4000K / 5000K
<u>Available Colour:</u>	Black finish. Special colour finish available on request.

Applications:

Hospitals, Schools, Aged Care facilities, Hotels, Factories, Pathways and Parkways.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.



*** NOTE: Dimensions and Cut Out sizes may change without notification.

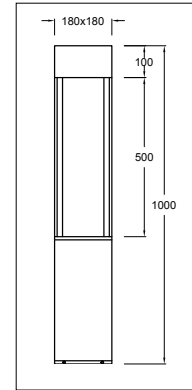

Cat	Watt	Colour Temperature	Lumen Output	CRI	Size L x W x Height	IP
RL9240-30	30W	3000K 4000K	1227 1575	80+	180 x 180 x 1000	IP65
RL9240-42	42W	3000K 4000K	1798 1933	80+	180 x 180 x 1000	IP65

Optional Extras

Options	Suffix	Comments
3000K	3K	3000K Warm white LED chip
4000K	4K	4000K Cool white LED chip
5000K	5K	5000K Day light LED chip
DALI/DSI dimmable	EBD	Integral DALI/DSI dimmable LED driver

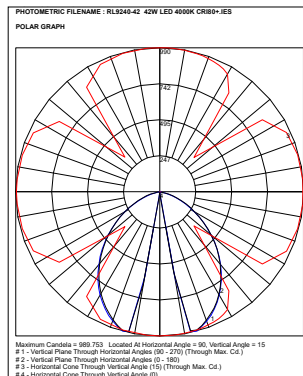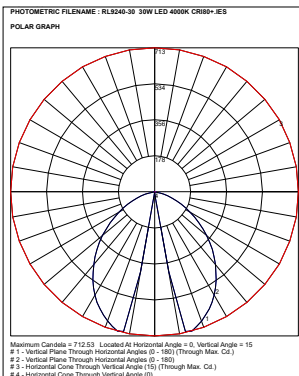

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.