


**RLA91 series**



**RLA91V series**

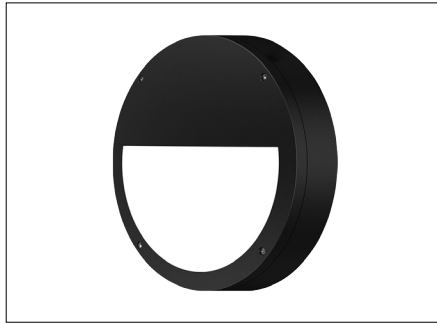

Contrast series IP65 vandal resistant LED wall lights with high efficacy LED chips and integral electronic LED driver.

LED lighting revolution and is making energy-wasting traditional lighting technologies obsolete through the use of energy efficient, environmentally friendly LED light.

Contrast series IP65 LED surface mounted luminaire designed with:

- Polycarbonate housing.
- UV-stabilised, Impact resistant opal polycarbonate diffuser.
- Silicon gasket for IP65 rating.
- Stainless steel fasteners.


<b><u>CRI:</u></b>	CRI80+
<b><u>Lamp's Life Time:</u></b>	50,000Hrs L70 / B10
<b><u>Driver options:</u></b>	Integral non-dimmable / DALI dimmable / Triac dimmable
<b><u>IP Rating:</u></b>	IP65
<b><u>IK Rating:</u></b>	IK10
<b><u>Colour Temperature:</u></b>	<u>Switchable:</u> 3000K / 4000K / 5700K
<b><u>Colour Rendering Index:</u></b>	CRI80+
<b><u>Available Colour:</u></b>	Black or White

**Applications:**


Hospitals, Schools, Hotels, Shops, Supermarkets, Foyers, Factories and Canopies.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.

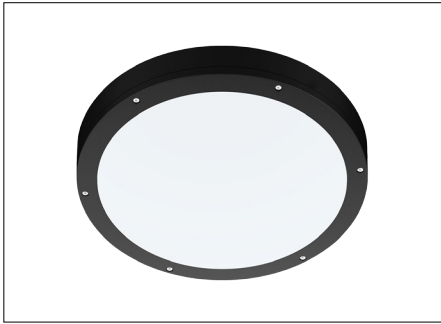





**RLA91 series**

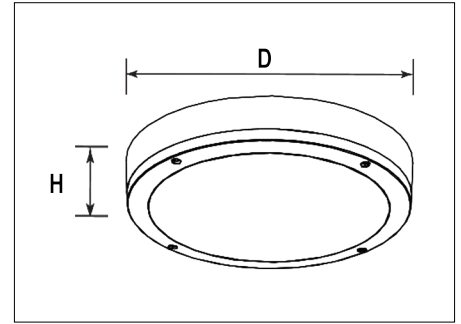

Cat	Watt	Colour Temperature	Lumen Output	CRI	Size Dia x Height	IP
RLA91/1-12	12W	3000K 4000K	1124 1209	80+	Ø 275 x 59	IP65
RLA91/1-18	18W	3000K 4000K	1514 1640	80+	Ø 275 x 59	IP65
RLA91/1-25	25W	3000K 4000K	2031 2301	80+	Ø 275 x 59	IP65
RLA91/2-25	25W	3000K 4000K	2305 2355	80+	Ø 350 x 59	IP65
RLA91/2-30	30W	3000K 4000K	2736 2801	80+	Ø 350 x 59	IP65

**Optional Extras**

Options	Suffix	Comments
Triac dimmable	DM	Integral Triac dimmable LED driver
DALI dimmable	EBD	Integral DALI dimmable LED driver

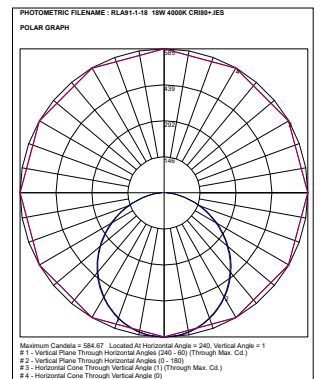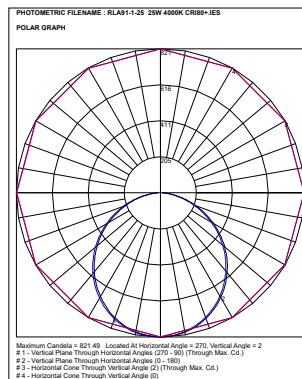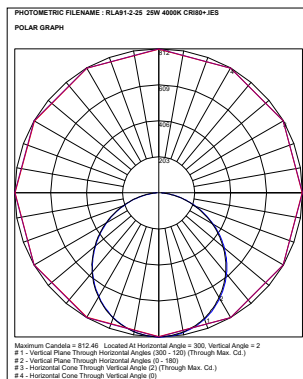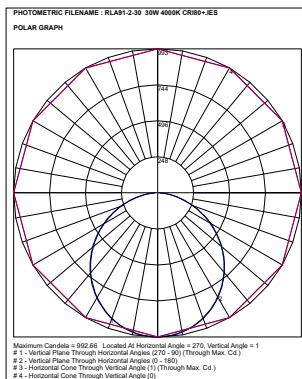


Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.







**RLA91/V series**

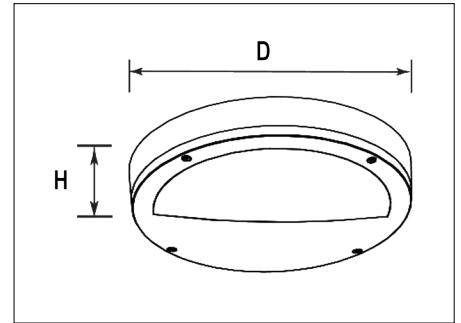

Cat	Watt	Colour Temperature	Lumen Output	CRI	Size Dia x Height	IP
RLA91V/1-12	12W	3000K 4000K	999 1032	80+	Ø 275 x 59	IP65
RLA91V/1-18	18W	3000K 4000K	1381 1416	80+	Ø 275 x 59	IP65

## Optional Extras

Options	Suffix	Comments
Triac dimmable	DM	Integral Triac dimmable LED driver
DALI dimmable	EBD	Integral DALI dimmable LED driver

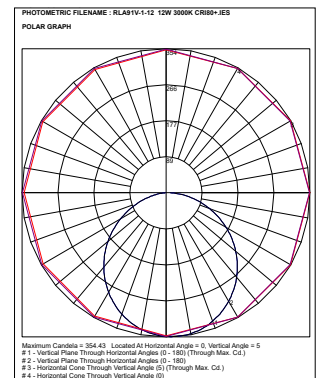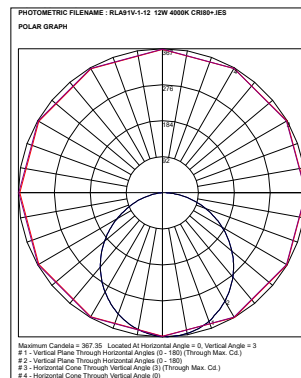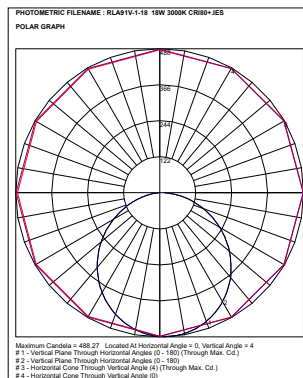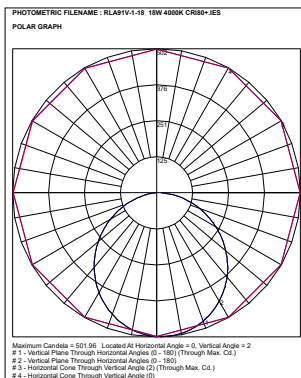

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.