



Surface mounted



Suspended



- Extruded aluminium continuous lighting system.
- Stylish design of luminaire for aesthetics appearance.
- Custom built to suit application and area.
- Electroplated aluminium finish. Powder coated finish is available on request.
- Special controlled frosted diffuser for glare control and optimum light output.
- Replaceable LED strips with its high efficiency can be altered for adjustments to meet application requirements.
- Integral non-dimmable LED drivers or DALI/DSI dimmable LED drivers.
- DALI or DSI dimmable LED drivers are available and compatible for dimming 1% - 100% range.
- Maintenance is easy with removable gear tray.
- Suspended system supplied with 2Mtr long stainless steel wire suspensions and 2Mtr long clear power cable.

Applications:

Offices, Meeting rooms, Schools, Foyers, Retail stores.

Razorline luminaire designed to meet the requirements of various watt and lumen packages:

- **Watt:** from 8W up to 51W
- **Lumen:** From 1195 Lumen up to 5790 Lumen “based on 4000K CRI80”
- **CRI:** CRI80+, CRI90+, Cyanosis
- **Lamp’s Life Time:** 50,000Hrs L80 / B10
- **LED Driver:** Non-dimmable or DALI/DSI dimmable LED driver
- **Colour Finish:** Electro plated aluminium finish. Special colour is available.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.





RLEX75D series

Cat	System Watt Per 1120mm	Luminaire Lumens Per 1120mm	Colour Temperature	Size W x H	CRI
RLEX75D	9W	1195	4000K	76 x 95	80+
RLEX75D	10W	1430	4000K	76 x 95	80+
RLEX75D	14W	1894	4000K	76 x 95	80+
RLEX75D	18W	2362	4000K	76 x 95	80+
RLEX75D	21W	2848	4000K	76 x 95	80+
RLEX75D	26W	3261	4000K	76 x 95	80+
RLEX75D	30W	3676	4000K	76 x 95	80+
RLEX75D	35W	4100	4000K	76 x 95	80+
RLEX75D	51W	5790	4000K	76 x 95	80+

Options

Specify Example: RLEX75D- (SM or SU) - (EBD) - (CY)

Options	Suffix	Comments
Surface mounted version	SM	
Suspended mounted version	SU	
DALI/DSI Dimmable	EBD	
CRI90+ LED chips	C90	CRI90+ LED chips
COI Cyanosis	CY	Cyanosis COI compliant

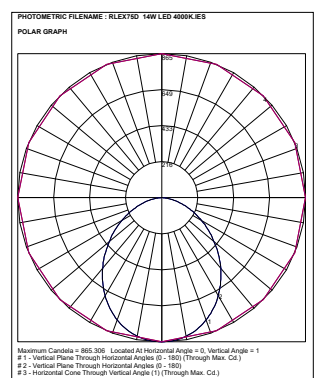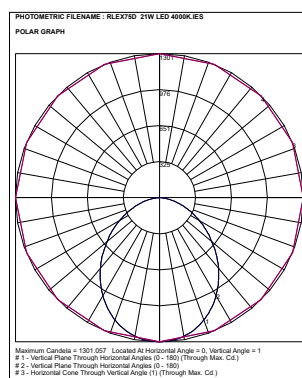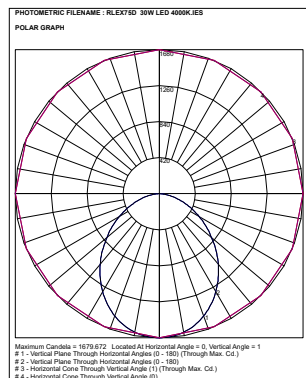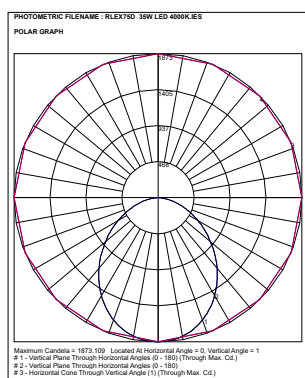

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.