



Switchable wattage  
Switchable colour temperature



**RLWL series, slimline LED diffused surface mounted luminaire range**

RLWL series surface mounted LED diffused fixture with slimline shallow design, white end caps, opal diffuser and integral electronic LED driver.

**LED Diffused series designed to meet the requirements of various watt and lumen packages:**

**Watt:** Switchable wattage 15W / 20W / 30W  
**Colour Temperature:** Switchable colour temperature 3000K / 3500K / 4000K  
**CRI:** CRI80+  
**Lamp's life time:** 50,000Hrs L70 / B10  
**LED Driver:** Integral Non-dimmable

**Colour finish:** White

**Applications:**




Commercial and Residential applications. Schools, Offices, Storage rooms, Foyer.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.

## RLWL Series Luminaire range

Cat	System Watt	Luminaire Lumens	Colour Temperature	Size L x W x H	CRI
RLWL12-15	15W	1830	4000K	1197x206x70	80+
RLWL12-20	20W	2440	4000K	1197x206x70	80+
RLWL12-30	30W	3660	4000K	1197x206x70	80+

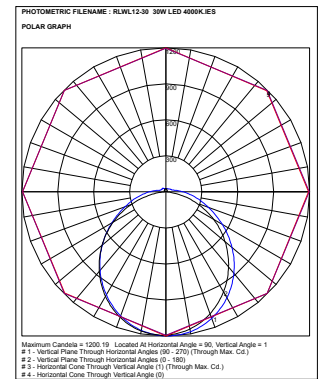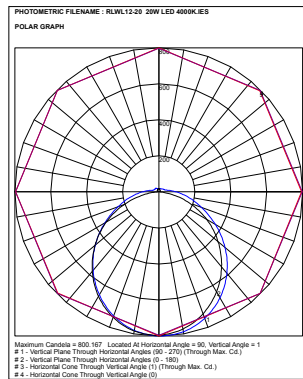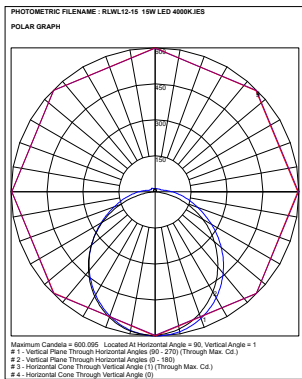

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.