

VPN/SS series IP65 slim design LED weatherproof luminaire with grey polycarbonate housing, opal polycarbonate diffuser, stainless steel clips and integral electronic LED driver.

<b><u>Colour Temperature:</u></b>	<b><u>Switchable:</u></b> 3000K / 4000K / 6000K
<b><u>CRI:</u></b>	CRI80+
<b><u>LEDs Life Time:</u></b>	50,000Hrs L70 / B10
<b><u>Beam Angle:</u></b>	Wide beam angle
<b><u>Driver options:</u></b>	Non-dimmable, DALI/DSI dimmable
<b><u>Clips:</u></b>	Stainless Steel Clips
<b><u>IP Rating:</u></b>	IP65
<b><u>IK Rating:</u></b>	IK10
<b><u>Options:</u></b>	Internal motion sensor Integral Motion & daylight sensor Maintained or Non-Maintained emergency

**Applications:**

Interior or exterior use, Industrial & Commercial applications, School, Warehouses, Car parks

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.





\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.

## VPN/S Series weatherproof luminaires

Cat	Watt	Colour Temperature	Lumen Output	Size LxWxH	IP	IK
VPN2/SS-20	20W	3000K 4000K 6000K	2268 2372 2265	660x117x79	IP65	IK10
VPN4/SS-40	40W	3000K 4000K 6000K	4268 4465 4264	1260x117x79	IP65	IK10

## Optional Extras

Options	Suffix	Comments
Motion Sensor	MS	Integral
Motion & Daylight Sensor	MSD	Integral
Maintained Emergency	EBM	Single point system integral maintained emergency pack
Non-maintained Emergency	NM	Single point system integral non-maintained emergency pack.
Motion Sensor and Maintained Emergency	MS-M	This option is available only for the 1260mm long luminaires.

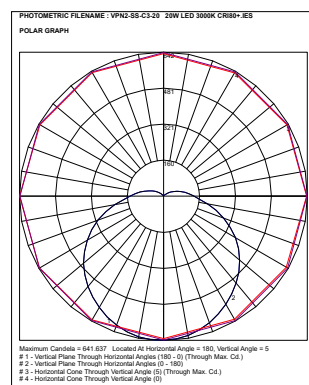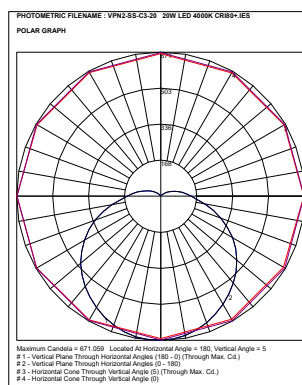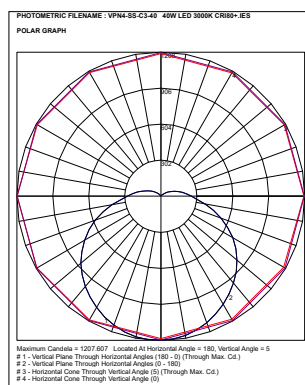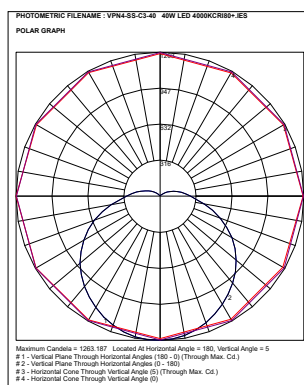

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.