

RL37/SQ



RL37/RD



RL37SQ Square and RL37RD Round series LED wall mounted Up & Down lighter or Down lighter with high efficacy COB LED chips.

IP65 series wall mounted Up & Down lights or Down lighter designed with:

- Extruded aluminium and die-cast aluminium housing with high corrosion resistance.
- Tempered glass diffuser,
- Silicon gasket for IP65 rating.
- Stainless steel fasteners.

CRI: CRI80+

Lamp's Life Time: 50,000Hrs L70 / B10 at 25 C°

Beam Angle: Standard: 100° Accessory installation: 45°/ 60°/ 90° / 20°+ 45°+20°

Driver options: Integral non-dimmable

IP Rating: IP65

IK Rating: IK06

Colour Temperature: 2700K / 3000K / 4000K / 5000K

Available Colour: Black or White finish





Applications:

Outdoor lighting, Schools, Shopping Centre, Hotels, Warehouses,





Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.


Up & Down Lighter

Cat	Watt	Up & Down Lighter	Colour Temperature	Lumen Output	CRI	Beam	Size H x W x D	IP
RL37/SQ-10	10W (2x5W)		2700K 3000K 4000K 5000K	941 948 1007 976	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65
RL37/SQ-16	16W (2x8W)		2700K 3000K 4000K 5000K	1436 1459 1570 1519	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65
RL37/RD-10	10W (2x5W)		2700K 3000K 4000K 5000K	858 862 906 882	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65
RL37/RD-16	16W (2x8W)		2700K 3000K 4000K 5000K	1278 1330 1444 1354	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65

Down Lighter

Cat	Watt	Down Lighter	Colour Temperature	Lumen Output	CRI	Beam	Size A x B x C	IP
RL37/SQ-5	5W Down only		2700K 3000K 4000K 5000K	392 392 414 414	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65
RL37/SQ-8	8W Down only		2700K 3000K 4000K 5000K	656 670 740 717	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65
RL37/RD-5	5W Down only		2700K 3000K 4000K 5000K	392 392 414 414	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65
RL37/RD-8	8W Down only		2700K 3000K 4000K 5000K	631 642 710 666	80+ 80+ 80+ 80+	100° 100° 100° 100°	165 x 95 x 67	IP65


Various beam angle attachments

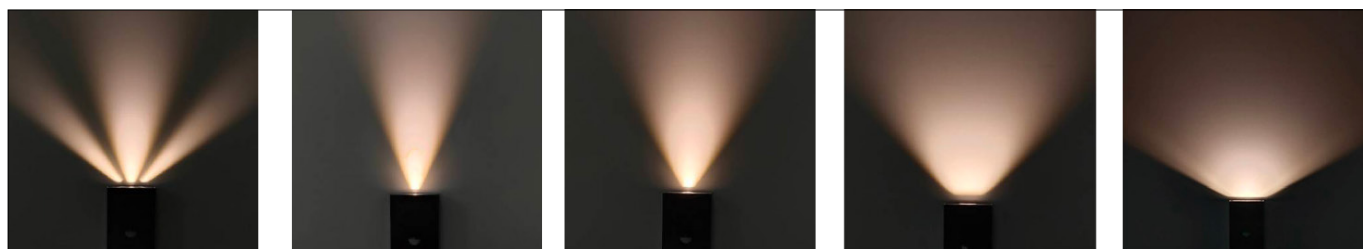

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.

Various beam angle accessories

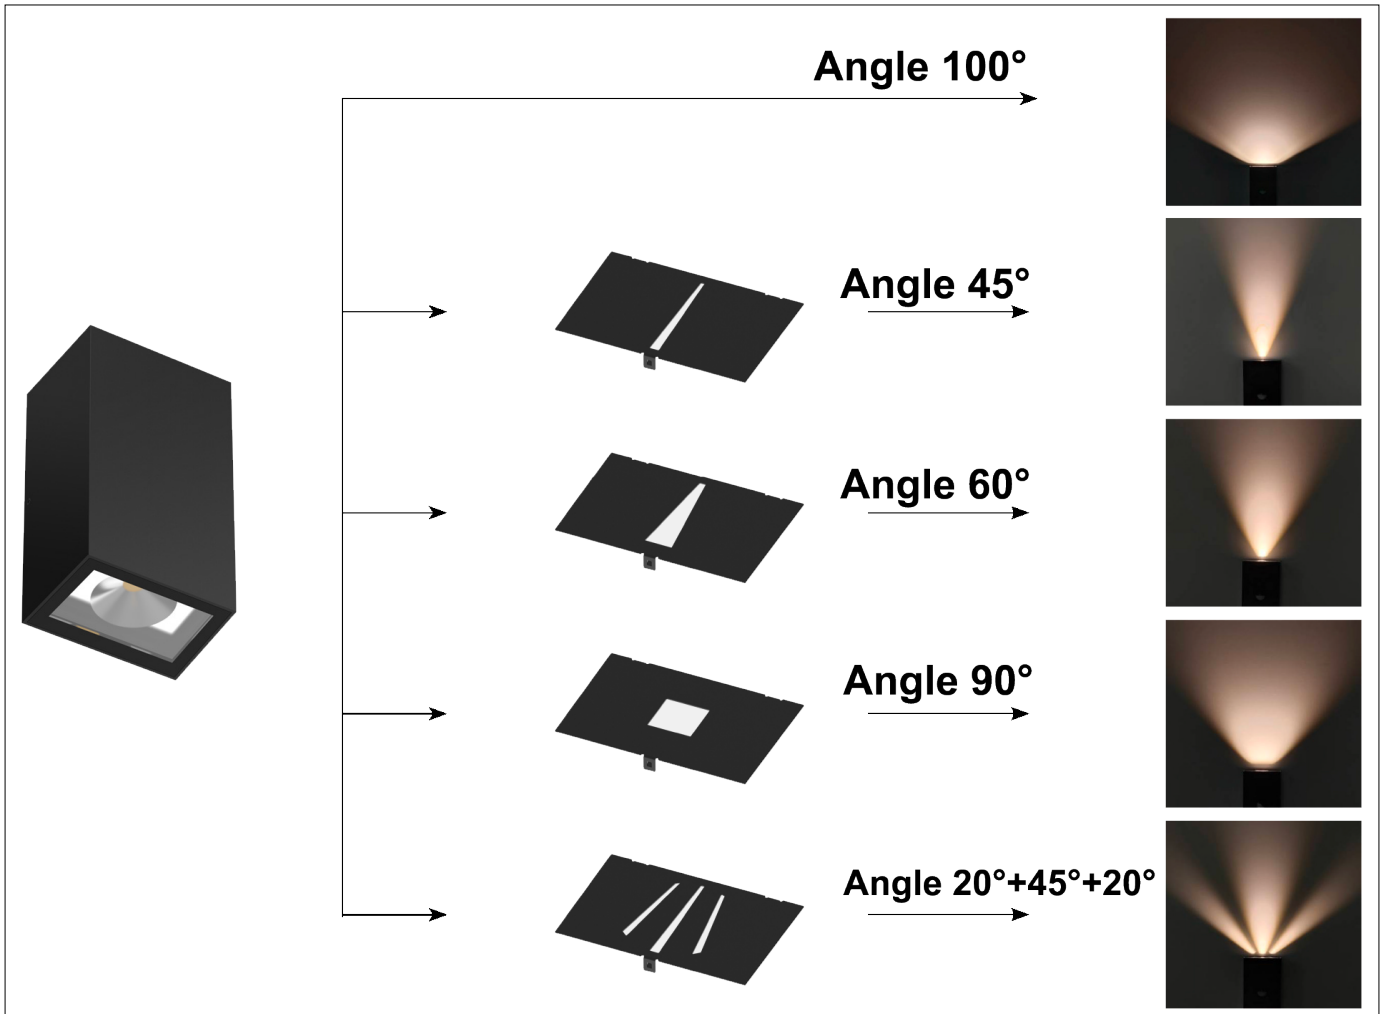









Ordering Specification

Options	Suffix	Comments
White finish	WH	White powder coat finish
Black finish	BK	Black powder coat finish
Accessory Angle 45°	A45	Angle 45°
Accessory Angle 60°	A60	Angle 60°
Accessory Angle 90°	A90	Angle 90°
Accessory Angle 20°+45°+20°	AV	Angle 20°+45°+20°









Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.

RL73/SQ Square Series

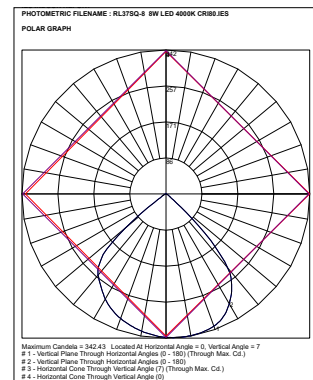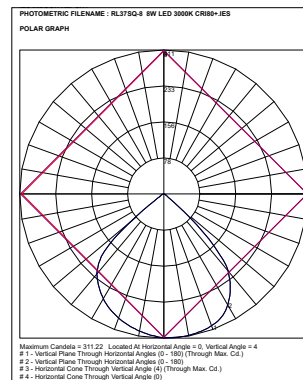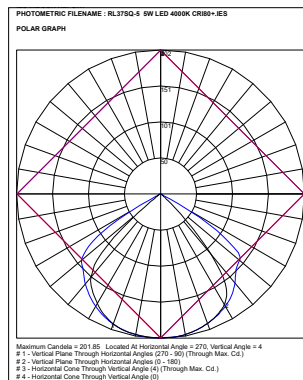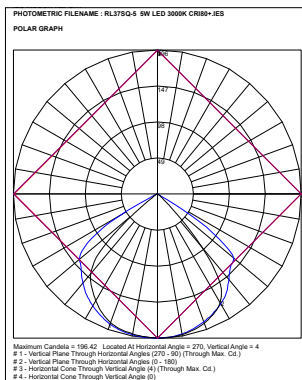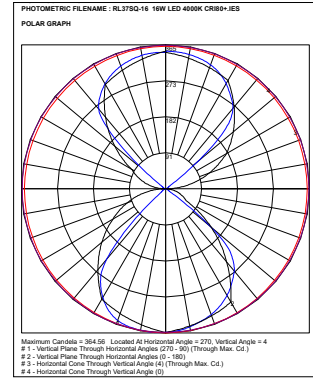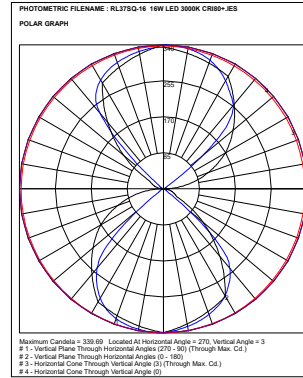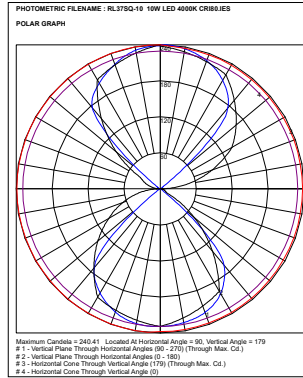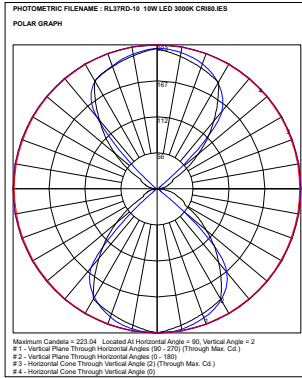

RL73/RD Round Series

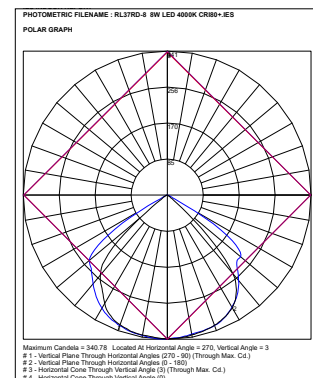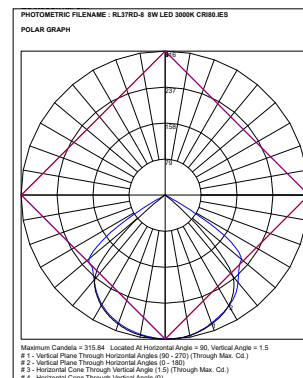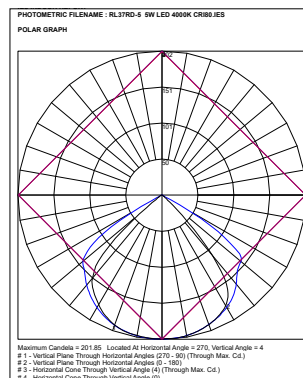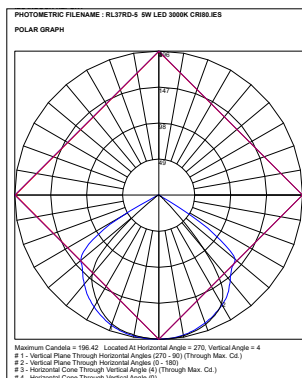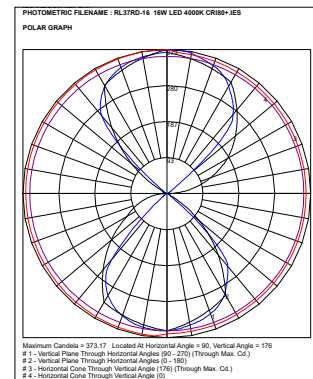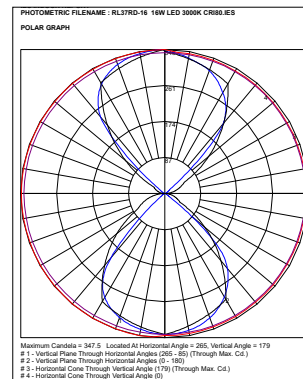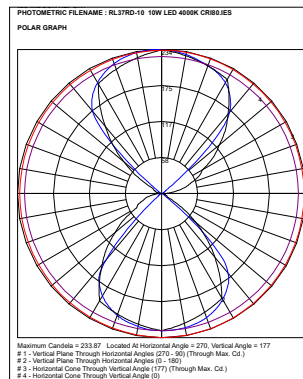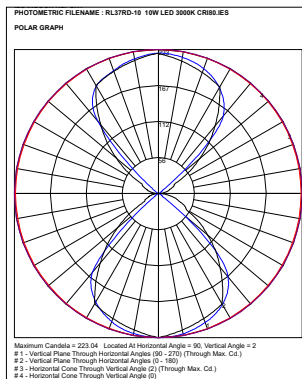

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.