

Contrast square series IP65 vandal resistant LED wall lights with high efficacy LED chips and integral electronic LED driver.

LED lighting revolution and is making energy-wasting traditional lighting technologies obsolete through the use of energy efficient, environmentally friendly LED light.

Contrast series IP65 LED surface mounted luminaire designed with:

- Polycarbonate housing.
- UV-stabilised, Impact resistant opal polycarbonate diffuser.
- Silicon gasket for IP65 rating.
- Stainless steel fasteners.

**CRI:** CRI80+

**Lamp's Life Time:** 50,000Hrs L70 / B10 at 25 °C

**Driver options:** Integral non-dimmable / DALI dimmable / Triac dimmable

**IP Rating:** IP65

**IK Rating:** IK10

**Colour Temperature:** Switchable: 3000K / 4000K / 5700K

**Colour Rendering Index:** CRI80+


**Available Colour:** Black or White

### **Applications:**


Hospitals, Schools, Hotels, Shops, Supermarkets, Foyers, Factories and Canopies.

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.


\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.




**RLA401/S-15**



**RLA401/S/G-15**



**RLA401/RC-15**







**RLA401/RC/G-15**

Cat	Watt	Colour Temperature	Lumen Output	CRI	Size L x W x H	IP
RLA401/S-15	15W	3000K 4000K 5700K	1504 1596 1631	80+	250 x 250 x 63	IP65
RLA401/S/G-15	15W	3000K 4000K 5700K	1308 1373 1389	80+	250 x 250 x 69	IP65
RLA401/RC-15	15W	3000K 4000K 5700K	1392 1478 1526	80+	250 x 150 x 63	IP65
RLA401/RC/G-15	15W	3000K 4000K 5700K	1140 1198 1227	80+	250 x 150 x 69	IP65

## Optional Extras

Options	Suffix	Comments
Triac dimmable	DM	Integral Triac dimmable LED driver
DALI dimmable	EBD	Integral DALI dimmable LED driver

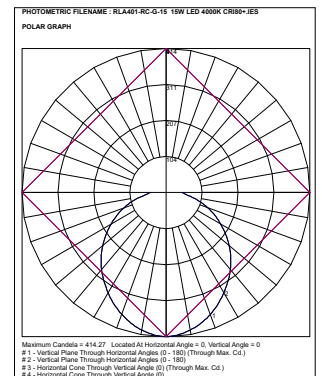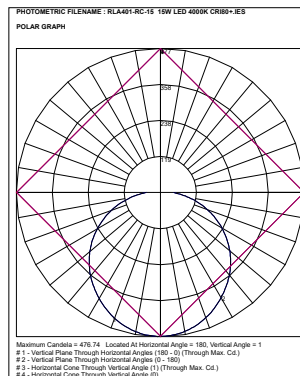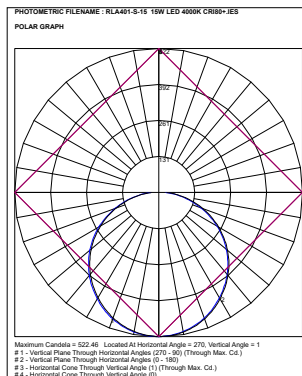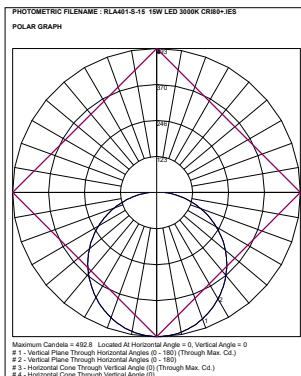

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.