



RLAG series LED luminaire has been designed for T/Bar recessed & Plaster recessed installation. Aluminium frame in powder coated white finish with high efficacy LED chips and Anti-Glare PMMA and polystyrene diffuser designed to eliminate LED's hot spots, even distribution on the diffuser, whilst providing excellent light transmittance ratio and UGR<19.

<b>CRI:</b>	CRI80+,
<b>Colour Temperature:</b>	Switchable 3000K / 4000K / 5700K
<b>LED Chips:</b>	High efficacy SMD LED chips
<b>Lamp's life time:</b>	50,000 Hrs L70 / B10 at 25 °C
<b>Diffuser:</b>	Anti-Glare PMMA and polystyrene diffuser, UGR<19
<b>UGR:</b>	UGR<19
<b>LED Driver:</b>	Remote Non-dimmable, Triac dimmable or DALI dimmable LED driver
<b>Frame:</b>	Aluminium in powder coated white finish
<b>IP Rating:</b>	IP20

**Applications:**

Schools, Offices, Meeting rooms, Foyers, Storage rooms, Retail Stores, Hospitals

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.



### T/Bar Recessed


Cat	System Watt	Luminaire Lumens	Colour Temperature	T/Bar Recessed Size L x W x H	CRI	UGR
RLAG66XT-36	36W	3685 3931 3796	3000K 4000K 5700K	595 x 595 x 40	80+	UGR<19
RLAG123XT-36	36W	3316 3499 3354	3000K 4000K 5700K	1195 x 295 x 40	80+	UGR<19
RLAG126XT-60	60W	5635 6119 5897	3000K 4000K 5700K	1195 x 595 x 49	80+	UGR<19

### Plaster Recessed

Cat	System Watt	Luminaire Lumens	Colour Temperature	Plaster Recessed Overall Size L x W x H	CRI	UGR
RLAG66PR-36	36W	3685 3931 3796	3000K 4000K 5700K	595 x 595 x 40	80+	UGR<19
RLAG123PR-36	36W	3316 3499 3354	3000K 4000K 5700K	1195 x 295 x 40	80+	UGR<19
RLAG126PR-60	60W	5635 6119 5897	3000K 4000K 5700K	1195 x 595 x 49	80+	UGR<19





Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.

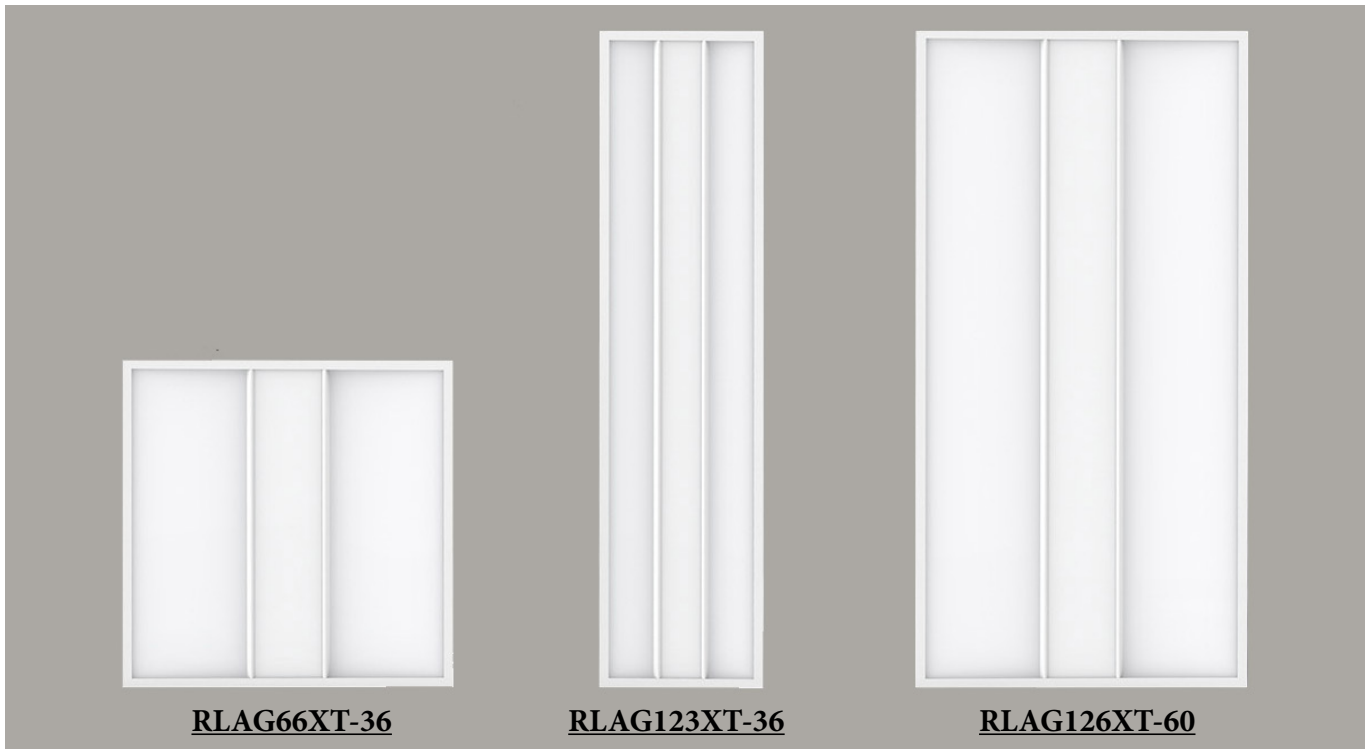

## Options

Options	Suffix	Comments
T/Bar recessed	XT	
Plaster recessing Kit	PR	Overall size: 595 x 595mm      Cutout = 570 x 570mm Overall size: 1195 x 295mm      Cutout = 1170 x 270mm Overall size: 1195 x 595mm      Cutout = 1170 x 570mm
Triac Dimmable	DM	Triac Dimmable LED driver
DALI Dimmable	EBD	DALI Dimmable LED driver

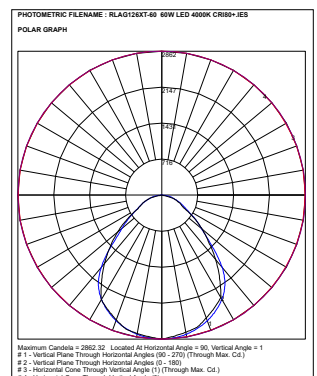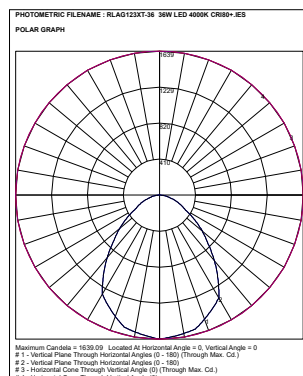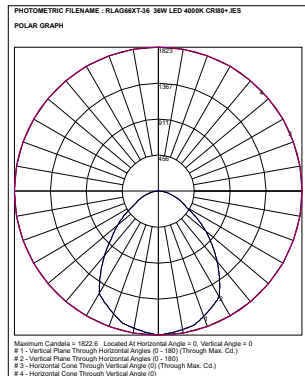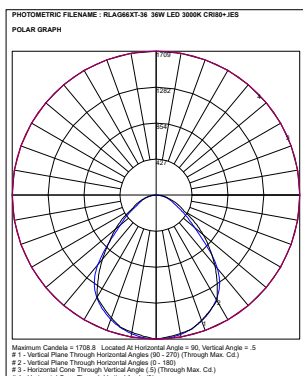

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

\*\*\* NOTE: Dimensions and Cut Out sizes may change without notification.