



ULB T/Bar recessed



ULB T/Bar recessed with Air Slots



RLV2 series LED luminaire with ULB louvre has been designed for T/Bar recessed & Plaster recessed installations. High lumen SMD LED light source, special optic design makes it UGR<19 low glare luminaire. Special optic frosted diffuser designed to eliminate LED's hot spots, whilst providing excellent light transmittance ratio.

CRI: CRI90+

Lamp's Life Time: 50,000Hrs L80 / B10 at 25° C

LED Driver: Remote Non-dimmable LED driver

Dimmable Driver Options: Triac, DALI or DSI Dimmable

Colour Finish: White finish. Special colour finish is available on request.

Mounting: T/Bar recessed, Plaster recessed

IP Rating: IP20

Applications:

Offices, Schools, Foyers, Showrooms, Retail Stores, Hospitals

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.





ULB T/Bar Recessed

Cat	System Watt	Luminaire Lumens	Colour Temperature	T/Bar Recessed Size L x W x H	CRI	UGR
RLV2/63XT-13	13W	1183 1351 1255	3000K 4000K 5700K	592x292x48	90+	UGR<19
RLV2/66XT-28	28W	2839 3259 3047	3000K 4000K 5700K	592x592x48	90+	UGR<19
RLV2/123XT-28	28W	2535 2895 2698	3000K 4000K 5700K	1192x292x48	90+	UGR<19

Options:

Specify as: RLV2/123- (XT or PR) - 28 - AIR - EBD

Options	Suffix	Comments
T/Bar recessed version	XT	Standard item
Plaster recessing Kit	PR	Overall size: 625x325mm / 625x625mm / 1225x325mm
Air Slots	AIR	Return air slots
Triac Dimmable	DM	Triac dimmable LED driver
DALI or DSI Dimmable	EBD	Please specify DALI or DSI dimmable

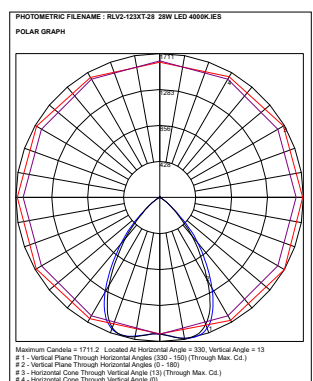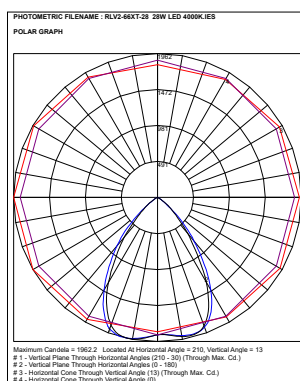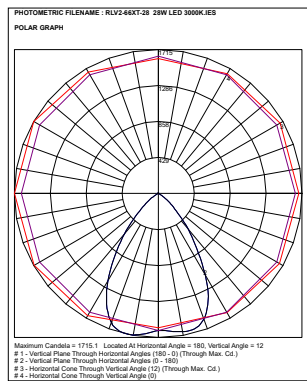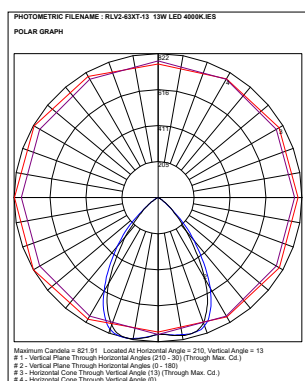

Lumen output based on Absolute lumens, 4000K LED chip and manufacturers rated mA drivers.

*** NOTE: Dimensions and Cut Out sizes may change without notification.